



Plast H

Plast H


Traditional light fittings with plastic diffusers of various sizes. The light fittings are designed for surface installation.

Light technique:

Direct

Optic

Plastic prism diffuser

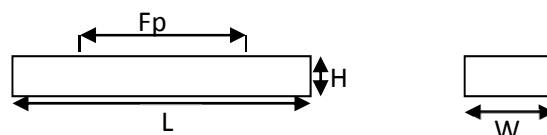

Materials and Finish

Housing: sheet steel, electrostatic powder coat finish, basic shade RAL 9003 (signal white, glossy).

| | L | W | H | Fp |
|-------|------|-----|----|------|
| 2x14W | 594 | 172 | 53 | 400 |
| 2x28W | 1194 | 172 | 53 | 1000 |
| 2x35W | 1494 | 172 | 53 | 1300 |

Control Gear

Electronic control gears, standard class EEI=A2

Light source

T5 / G5

Electrical data

230V 50 Hz, Class I, IP44, CE


Mounting / connection

Surface mounted.

2 pce. Ø=19mm knock-out holes in each ends.

2 pce. Ø=19mm holes with inlet nipples on top end.

Screwless 3 pole terminal allows connecting conductors up to 2,5 mm².

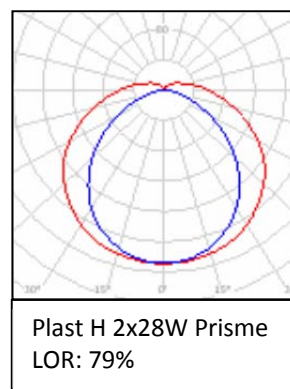

| Description | Code no. |
|-----------------------------------|--------------|
| Plast H 2x14W T5 HF A2 Prism IP44 | 6046 006 143 |
| Plast H 2x28W T5 HF A2 Prism IP44 | 6046 006 020 |
| Plast H 2x35W T5 HF A2 Prism IP44 | 6046 006 156 |